


CONSOLE CABLE 1.8M



PARAMETER

RATED VALUE

Operating temperature range	-20 °C - 80 °C
Signal voltage levels at the RJ45 connector	RS232 standard levels
Information about ESD immunity	6 kV
Maximum supported baud rate	256000 Bd
Conductor	24 AWG
Length	1.8 m
Connectors	8P8C(RJ45) plug; USB 2.0 A Male
IC	FT232RL+ZT213
Certificates	Regulation (EC) No 1907/2006 (REACH) Directive 2011/65/EU and amendment (EU) 2015/863 (RoHS 3)

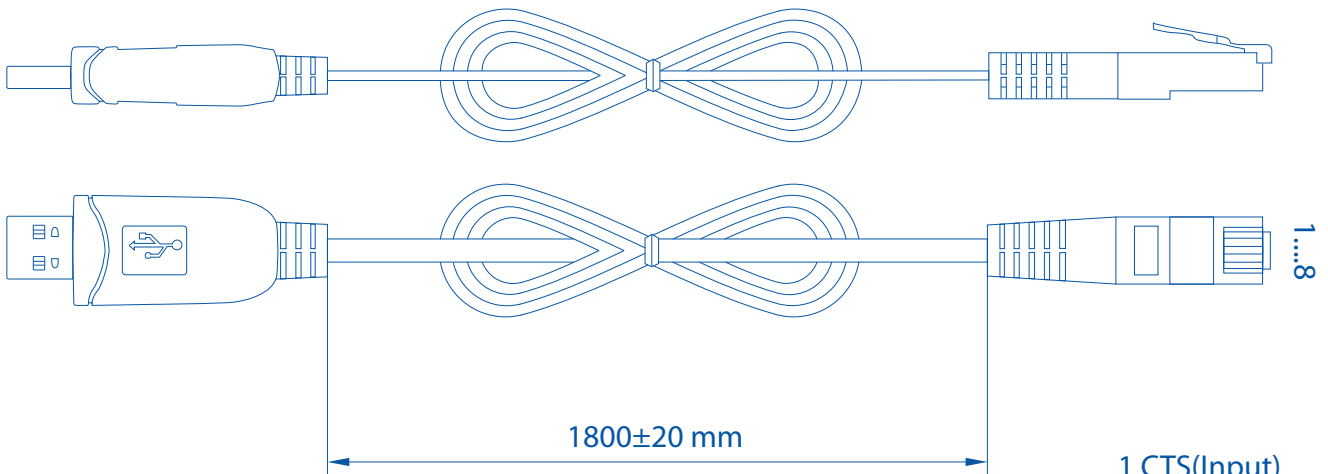

- 1 CTS(Input)
- 2 DSR(Input)
- 3 RXD(Input)
- 4 GND
- 5 DCD(Input)
- 6 TXD(Output)
- 7 DTR(Output)
- 8 RTS(Output)