

# hAP


This small home access point is the perfect device for homes or small offices where all you need is a wireless AP and a few wired devices connected. Based on our popular RB951-2n, the new hAP is an improvement in many areas.

- Dual chain wireless 2.4GHz
- 650MHz CPU
- 64MB of RAM
- Passive PoE output on port 5
- USB port for 3G/4G modem



The device is very small and will look good in any home or office, wall mounting anchor holes are provided.

The hAP can be powered from the power jack or with passive PoE from a PoE injector. The power adapter is included. The hAP is preconfigured, so all you need to do, is plug in the internet cable, the power, and start using the internet by connecting to the MikroTik network.

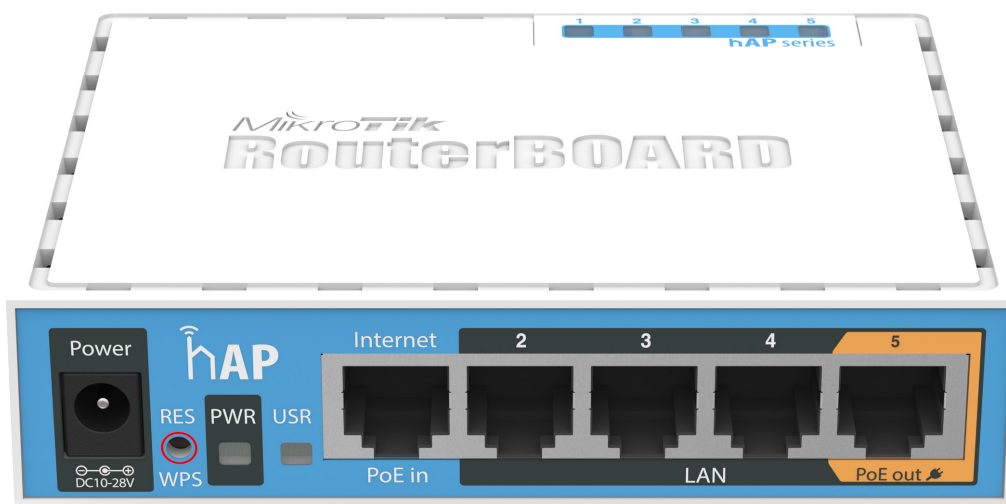

## Specifications

Product code	RB951Ui-2nD
CPU nominal frequency	650 MHz
CPU core count	1
Size of RAM	64 MB
10/100 Ethernet ports	5
Wireless	Built-in 2.4 GHz 802.11b/g/n, dual-chain
Antenna gain	1.5 dBi
Antenna beam width	360°
Wireless chip model	QCA9531
PoE in	Yes
PoE out	Yes (Ether5)
Supported input voltage	6 V - 30 V (Jack or Passive PoE)
Extras	USB 2.0 Type A full size port, 1A
Dimensions	113 x 89 x 28mm
License level	4
Operating System	RouterOS
CPU	QCA9531
Max Power consumption	5 W

## Included



24V 0.8A Power adapter

## Wireless specifications

RATE	Tx (dBm)	Rx (dBm)
1MBit/s	22	-96
11MBit/s	22	-89
6MBit/s	20	-93
54MBit/s	18	-74
MCS0	20	-93
MCS7	16	-71